


B120E

Wax/Resin for near edge

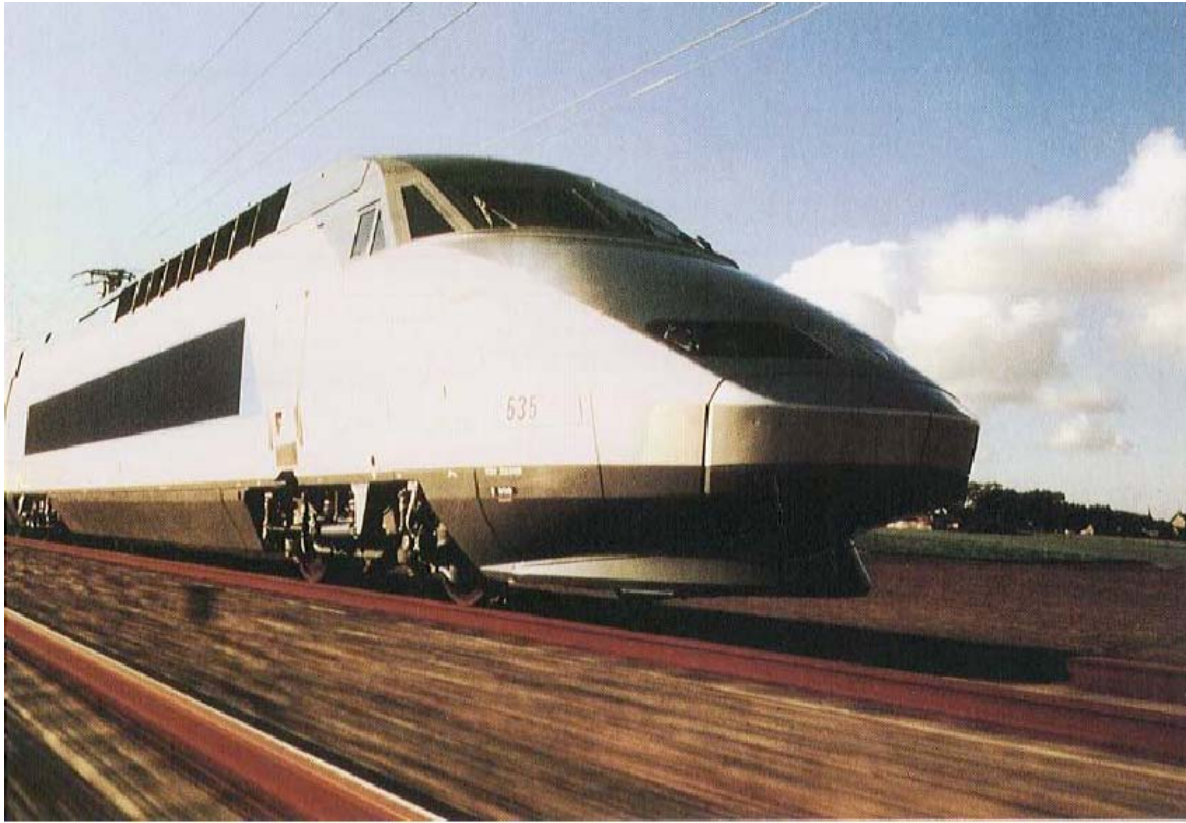

FEATURES

1. Applicable on a wide range of receiving materials (uncoated paper, coated paper, synthetics)
2. RICOH's unique coating on the back allows reliable and superior matching qualities with the thermal head.
3. High heat resistance

RECOMMENDED APPLICATIONS

- POS labels
- Shipping, storage, inventory labels
- Product identification labels

RICOH

TTR PROPERTIES

Grade	Wax-Resin
Base material	Polyester film
Base caliper	4.5 \pm 0.4 μ m
Ink colour	Black
Transmission density	More than 0.65 * 1

PRINTING PROPERTIES

Image density	More than 1.4 (on coated paper) *2
Receiving material	Low weight coated paper, coated paper, tag paper, vellum

DURABILITY OF PRINTED IMAGE

Resistance to smear	Decodability ANSI more than A *3
Resistance to light	Decodability ANSI more than A*4
Resistance to water	Decodability ANSI more than A *5

*1, *2, *3, *4, *5 : by RICOH standard test method

Usage condition : 5 \approx 40°C, 10 \approx 95% RH

Storage condition: : -20 \approx 40°C, 10 \approx 90%RH

Storage life: 48 months after manufacturing date

CERTIFICATES / REGISTRATION / EU DIRECTIVES



- Directive RoHS
- Directive WEEE
- Directive 2003/11/EC
- Directive 94/62/EC
- Directive 2000/53/EC

For other directives, please contact us

RICOH